


HAND AUGERS

STANDARDS: ASTM D420, D1452 | AASHTO T86, T202

Designed for soil investigations and explorations, and to obtain representative samples.

Complete with "T" handle, and rod 1 m long.
 Made of special galvanized steel.

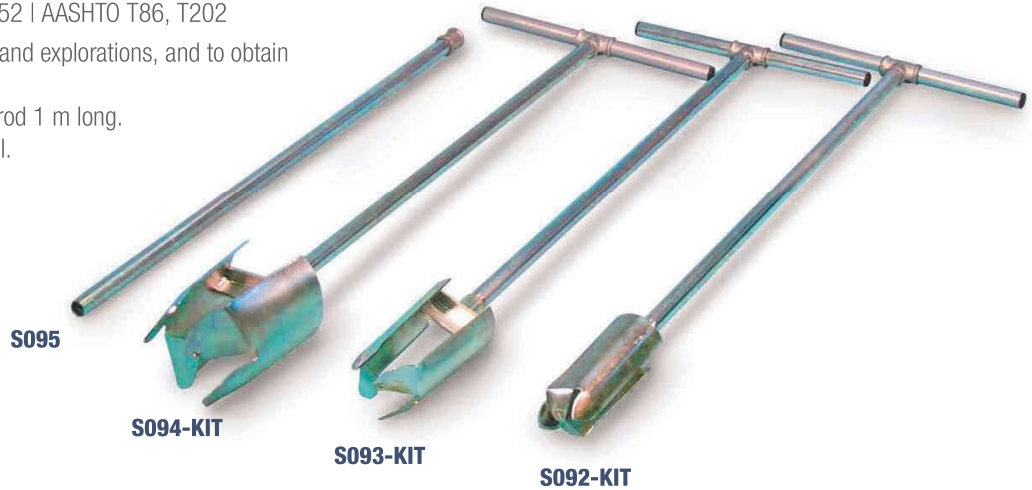

Models	Description	Weight kg
S092-KIT	Hand Auger, Ø 80 mm x 1 m long	4
S093-KIT	Hand Auger, Ø 100 mm x 1 m long	5
S094-KIT	Hand Auger, Ø 150 mm x 1 m long	6
S095	Extension rod for above 1 m long	2

AUGER POWER HEAD TO OBTAIN DISTURBED SOIL SAMPLES.

Supplied **without** augers, to be ordered separately (see accessories).

MODELS

S096 AUGER POWER HEAD

Motor capacity 3 HP, two strokes, without speed inverter.
 Fitted with two handwheels, to be used just by one operator.
 Drilling holes up to Ø 200 mm and max. depth of 1000 mm.
 It does not accept extension rods.
 Supplied without augers (see accessories)

Weight: 10 kg approx.

ACCESSORIES

- S096-03** AUGER Ø 100 mm x 1 m long
- S096-04** AUGER Ø 150 mm x 1 m long
- S096-05** AUGER Ø 200 mm x 1 m long
- S096-06** EXTENSION ROD 1 m long



S096



S097

S097 AUGER POWER HEAD

Motor capacity 6 HP, two strokes, equipped **with speed inverter** to facilitate the extraction of the augers.
 Fitted with two handwheels, to be used by two operators.
 Supplied without augers (see accessories)

Weight: 30 kg approx.

ACCESSORIES

- S097-03** AUGER Ø 100 mm x 1 m long
- S097-04** AUGER Ø 150 mm x 1 m long
- S097-05** AUGER Ø 200 mm x 1 m long
- S097-06** EXTENSION ROD 1 m long